Celesnity

MINDER & THE WORLD MODEL
FOR CTOS AND HEADS OF ENGINEERING

Agentic OS on world first's AI (Factory World) Model, *built on the systems you already run.*

How Minder connects, what it learns, how every prediction is tested, and how your data stays yours.

London, United Kingdom · celesnity.com



WHAT IT CHANGES

Three numbers, *each defined so your team can audit it.*

Number	Definition	Computed from	Evidence at Saigon Food
Throughput	Good units per hour; OEE as availability × performance × quality	Machine run state, stops with reasons, counts	Run hours per freezing line: one of three ran one day in five
Yield	First pass yield; scrap and rework	Quality records, batch history, process conditions	A probe with 98% invalid readings, found and since fixed
Energy saved	kWh per unit or per kg, by line and machine	Energy meters, current sensors, tariff windows	17% plant energy saving identified by Saigon Food’s team

Every number is baselined in week one and traced to its device and timestamp

ARCHITECTURE

From the physical record *to an approved action.*



INTEGRATIONS

It reads what you already run. *Nothing is replaced.*

Source	How Minder connects	At Saigon Food
Monitoring or SCADA software	Reads device data from the software you already run	BOSS Mini: 15 cold chain devices, a reading every 9.5 seconds
Retrofit sensors and cameras	Current, three axis vibration and temperature sensors; cameras that read dial gauges	Compressor 4: current and vibration; gauge reading is next
PLCs and HMIs	Connected line by line after the week one survey	In the proposed paid pilot
Energy meters	Multichannel meters per line and per compressor	In the proposed paid pilot
ERP, spreadsheets, shift logs	File or API import, mapped into the operational graph	Hourly hand logs in Excel replaced by automatic readings

Pilots connect read only to your systems. Writing back comes later, as a step you approve, with change control.

EVIDENCE · SAIGON FOOD, FOOD PROCESSING

Raw readings arrive in seconds, *not at the end of a shift.*

STREAM 1 Live	15 cold chain devices	→ BOSS Mini, the plant's monitoring software	→ Minder platform	→ Plant model, dashboards, alerts, chat
STREAM 2 In testing	Compressor 4	→ Minder firmware: current and vibration	→ Minder platform	→ Run hours, energy estimate, wear signals

9.5 s
between readings, against one hand log an hour

9,100
points per device per day, against 24

8 s
from measurement to the platform, about

1.7M
device records since 29 September 2026

Source: Minder platform, Saigon Food pilot report, 18 October 2026

WHAT BROKE

What broke in the first month, *and the fix.*

Issue	What the data showed	Fix
Compressor sensor link	Full data on only 2 of 5 days. The radio signal weakens while the compressor runs: −70 dBm running against −53 dBm stopped.	Wired gateway or external antenna, included in the pilot hardware.
Cold store probe	Probe 1 returned 0.0 °C in 98% of readings, a fault present since 1 October. Each reading carries its device and timestamp, so the fault showed at once.	Fixed. Alerts are now on for all 16 devices.
Alerts after defrost	7 of 9 alerts in Cold Store 3 opened straight after a timed defrost. Each defrost warms the room to about −8 °C and takes 70 to 85 minutes to recover.	Hold alerts for 90 minutes after each defrost. Defrosting on demand is a later step, proven by planned trials.

Source: Minder platform data, 13 to 17 October 2026, Saigon Food pilot report

THE WORLD MODEL

How it predicts, *and how each prediction is tested.*

HOW IT PREDICTS

Learns


From the event log and operational graph: how your plant responds to speed, schedules, defrosts and maintenance.

Forecasts

What a decision is expected to do to throughput, yield, energy and wear, each with a confidence.

Recommends

Options, scored. Your people approve what matters.

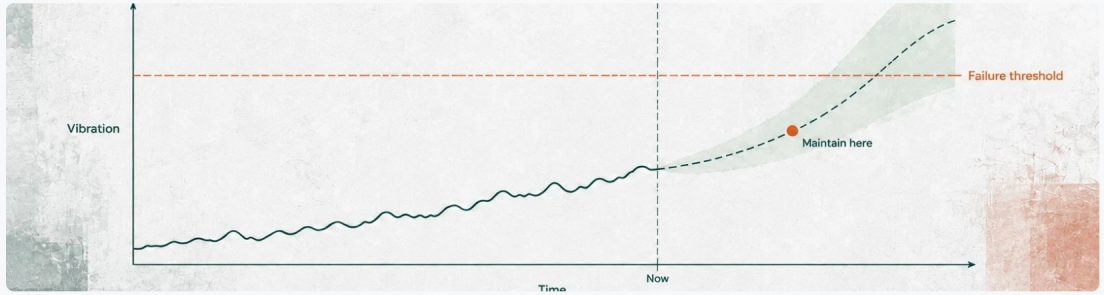

HOW EACH PREDICTION IS TESTED

- Model and thresholds are fixed before each test, then scored on events it has not seen.
- Compared with your current routine and with a simple baseline.
- Scored on accuracy, nuisance alarms, missed exceptions, detection delay and supervisor effort.
- Changes to how the plant runs are proven through planned trials, not past data alone.

FOUR USE CASES

Four use cases: *the signals in, the decision out.*

Use case	Signals in	Decision out	Status at Saigon Food
Predictive maintenance	Current, three axis vibration, pressure, run hours, repair history	A wear forecast and a service window before failure	Signals live on a compressor; forecasts in development
Downtime planning	Run hours, production and defrost schedules, line load	Stops planned into low load windows; work balanced across lines	Run hours live for every freezing line
Energy saving	kWh per line and compressor, tariff windows, room temperatures	kWh per kg; waste flagged; batches moved to cheaper hours after trials	17% identified; metering in the pilot
Worker empowerment	Shift logs, procedures, fix history, voice and chat	Shift logs filled automatically; the plant's own fix at the machine	Shift logs live; procedures in the pilot

Most plants start with one use case on one area, then extend

SECURITY AND DATA

Your data stays yours. *We state exactly what is certified.*

OWNERSHIP
You own your raw data.

TRAINING
Your data never trains models for other customers without your written consent.

ACCESS
Least privilege, set by site, role, team and workflow.

ENCRYPTION
In transit and at rest, wherever supported.

AUDIT TRAIL
Every number traced to its device and timestamp.

WORKERS
No individual worker scoring.

AI AUTHORITY
Safety critical actions never rest on AI output alone.

CERTIFICATION
GDPR. ISO 27001 pursued.

Full policy: celesnity.com/policies/security · Bring your security questionnaire to the first call

DEPLOYMENT

Twelve weeks from survey *to a pass or fail decision.*

WEEKS 1 TO 2

Survey and baseline

Map lines and signals, test connections, sign the baseline.

WEEKS 3 TO 5

Install and connect

Sensors, meters and gateways in; PLC and HMI connected; plant model built.

WEEKS 5 TO 10

Operate at full load

Alerts, shift logs, kWh per line. Every exception logged with what Minder changed.

WEEKS 11 TO 12

Measure and decide

Results against the baseline; pass or fail on the agreed gates.

WHAT WE NEED FROM YOU

Equipment signals. Controller or PLC readings, or cabinet space for a retrofit sensor.
Quality. Rework, rejects and complaints, with dates.

Shift records. Logs, checklists and handover sheets, even on paper.
Maintenance. Repair history and service intervals per machine.

Orders. Order and dispatch records from your ERP or spreadsheets.
People. One process owner per area, for a 30 minute interview.

Our side: two forward deployed engineers on site · Each item marked available, partial or missing in week one

PASS OR FAIL

Pass or fail on gates *agreed in week one.*

Gate	Threshold	How it is measured
Data completeness	95% or more valid data, four weeks in a row, on every device	Counted per device by Minder
Used every shift	90% or more of shifts confirmed by the shift lead; time spent logging down by 70% or more	Timed before and after
Recurring value	Measured recurring benefit, one-off fixes counted separately, set against the whole plant subscription	Exception log and metered energy, signed by both sides

ALSO TRACKED What Minder changed about each exception · alert precision of 80% or better after tuning · 90% or more of stops over five minutes logged with a reason

Our target is whole plant payback within 12 months. A target, not a guarantee.

Celesnity

NEXT STEP: A FLOOR WALK

Give us one line. *We'll show you the plant behind the plan.*

Bring your questionnaire and a list of the systems on that line.



eric@celesnity.com · celesnity.com

Celesnity Ltd · London, United Kingdom